



Report No.202600654IST

DENEY RAPORU / TEST REPORT**BAŞVURU FİRMANIN ADI / APPLICANT NAME**

Casper Bilgisayar Sistemleri A.Ş.

BAŞVURU FİRMANIN ADRESİ / APPLICANT ADDRESSFatih Sultan Mehmet Mah. Balkan Cad. No: 47 Ümraniye/
İstanbul**PROJE NUMARASI / PROJECT NUMBER**

IST26Q.0694.07

HİZMET KAPSAMI / SCOPE OF SERVICE

Construction Check

RAPOR NUMARASI / REPORT NUMBER

202600654IST

YAYIMLANMA TARİHİ / ISSUE DATE

29.09.2026

TOPLAM SAYFA NUMARASI / TOTAL NUMBER OF PAGES

14

Deney ve/veya ölçüm sonuçları, genişletilmiş ölçüm belirsizlikleri (olması halinde) ve deney metotları bu sertifikanın tamamlayıcı kısmı olan takip eden sayfalarda belirtilmiştir.

The test and/or measurement results, the uncertainties (if applicable) with confidence probability and test methods are given on the following pages which are part of this report.

Aksi talep edilmediği sürece Intertek Türkiye Elektrik Laboratuvarı paylaşılan risk karar kuralını uygulamaktadır.

The Intertek Turkey Electrical Laboratory applies the shared risk decision rule unless otherwise requested.

Bu raporda yer alan deney ve ölçüm sonuçları, müşteri tarafından sağlanan numune veya numunelere ait olup yalnızca test edilen numune(ler) için geçerlidir; uygunluk değerlendirmesi de bu numune(ler) üzerinden yapılmıştır.

The test and measurement results in this report belong to the sample(s) provided by the customer and are only valid for the tested sample(s); the conformity assessment has been made based on these sample(s).

Bu rapor, laboratuvarın yazılı izni olmadan kısmen kopyalanamaz, çoğaltılamaz, üçüncü şahıslarla paylaşılamaz, reklam aracı olarak kullanılamaz ve imza bulunmayan raporlar geçersizdir.

This report cannot be partially copied, reproduced, shared with third parties, or used as an advertising tool without the written permission of the laboratory, and reports without signature are not valid.

Test Sonuç Özeti / Test Result Summary

Tanım / Description	Sonuç / Verdict
1. System Performance Benchmark Test	PASS
2. Display Brightness Uniformity Test	PASS
3. Thermal Performance Test	PASS
4. Button Endurance Test	PASS
5. Acoustic Noise Test	PASS



DENEY RAPORU / TEST REPORT

BÖLÜM 1: TEST BAŞVURUSUNA AİT GENEL BİLGİLER

/SECTION 1: GENERAL INFORMATION ABOUT THE TEST APPLICATION

TALEP EDİLEN HİZMET/ SERVICE REQUESTED

Numune Tanımı: / Test item Description	Tablet
Marka: /Trademark	Casper
Model/Tip referansı: / Model/Type reference	PAD H10 PRO
Üretici Firmanın Adı ve Adresi : / Manufacturer Name & Address	Casper Bilgisayar Sistemleri A.Ş. Fatih Sultan Mehmet Mah. Balkan Cad. No: 47 Ümraniye/İstanbul

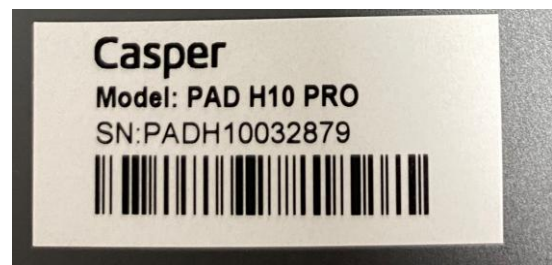
MODEL TABLOSU/ Model Table

Marka /Trademark	Model/Tip referansı / Model/Type reference	CPU	OS	Teknik Özellikler /Specifications
Casper	PAD H10 PRO	Dimensity 7050	Android 16	8GB Ram

TEST /TESTING

Test Numunesi Geliş Tarihi: /Date of receipt of test item	26.08.2026
Test Numunesi Kabul No: /Test item receipt number	S26.0689
Test Numunesi Seri No: /Test item serial number	PADH10032879
Test Tarihi: /Date (s) of performance of tests	31.08.2026 - 21.09.2026

İŞARETLEME ETİKETLERİ /MARKING PLATES



DENEY RAPORU / TEST REPORT

BÖLÜM 2: TEST METODU VE YAPILIŞ:

/SECTION 2: TEST METHOD AND APPLICATION

1- System Performance Benchmark Test

AnTuTu Benchmark								
	Intertek Test Results			Intertek Test Result average	Casper Test Result average	Criteria	Difference (Intertek&Criteria)	Verdict (-/+ %3 PASS)
	Test 1	Test 2	Test 3					
CPU	280.581	278.573	274.155	277.770	263.967	260.000	105%	PASS
GPU	72.589	75.292	74.026	73.969	73.671	70.000	100%	PASS
MEM	211.006	210.228	208.707	209.980	167.417	190.000	125%	PASS
UX	232.694	238.838	237.950	236.494	236.495	210.000	100%	PASS
TOTAL	796.870	802.931	794.838	798.213	741.549	730.000	108%	PASS
Storage								
General Score	102.792	102.969	102.107	102.623	62.903	90.000	114%	PASS
Sequence Read	14.949	15.052	14.577	14.859	13.476	14.000	106%	PASS
Sequence Write	14.248	14.399	14.638	14.428	8.558	13.500	107%	PASS
HTML 5								
AnTuTu HTML5 Score	50.646	51.079	51.863	51.196	47.685	48.000	107%	PASS

DENEY RAPORU / TEST REPORT

GPU Performance Test – 3DMark								
	Intertek Test Results			Intertek Test Result average	Casper Test Result average	Criteria	Difference (Intertek&Criteria)	Verdict (-/+ %3 PASS)
	Test 1	Test 2	Test 3					
Steel Nomad Light	250	250	250	250	253	230	109%	PASS
Wild Life	2.239	2.255	2.258	2.251	2.248	2.100	107%	PASS
Wild Life Extreme	629	638	637	635	513	600	106%	PASS
Sling Shot	5.177	5.207	5.224	5.203	5.145	4.800	108%	PASS

DENEY RAPORU / TEST REPORT

COMBO Performance Test - PCMark for Android (3.1)

	Intertek Test Results			Intertek Test Result average	Casper Test Result average	Criteria	Difference (Intertek&Criteria)	Verdict (-/+ %3 PASS)
	Test 1	Test 2	Test 3					
Work Performance	8.649	8.995	9.128	8.924	8.857	8.500	105%	PASS
Web Browsing	6.262	6.190	6.566	6.339	6.689	6.000	106%	PASS
Video Editing	5.275	5.284	5.277	5.279	5.288	5.100	104%	PASS
Writing	13.392	13.622	13.206	13.407	12.259	13.000	103%	PASS
Photo Editing	13.803	14.460	15.340	14.534	14.466	14.000	104%	PASS
Data Manipulation	7.923	9.140	9.024	8.696	8.709	8.500	102%	PASS

2- Display Brightness Uniformity Test

Display Brightness Uniformity Test

Test method	The device display is divided into nine equal sections, and the display luminance (nit) (cd/m ²) of each section is measured using a spectrometer.		
	Intertek Test Results	Criteria	Verdict
Center	504	500	PASS
Average	505	500	PASS

DENEY RAPORU / TEST REPORT

3- Thermal Performance Test

Thermal Performance Test						
Test method	A random YouTube video is played at 100% brightness and 100% volume. Measurements are taken after 60 minutes. The device must not be connected to the charger.					
Test scope	Measurement and recording of the temperature values at the specified measurement points after 60 minutes.					
Test duration	60 minutes					
Ambient temperature	23,4 °C					
Measurement Points	Intertek Test Results		Explanation	Criteria	Difference	Verdict
	Max. Temperature (°C)	Avg. Temperature (°C)				
Back Cover upper left	30,3	29,5	Upper left area at the rear of the case	45	-32,7%	PASS
Back Cover lower left	29,9	28,5	Lower left area at the rear of the case	45	-33,6%	PASS
Back Cover upper right	29,5	29,1	Upper right area at the rear of the case	45	-34,4%	PASS
Back Cover lower right	29,5	29,2	Lower right area at the rear of the case	45	-34,4%	PASS
LCD center	36,0	35,0	Center point of the device monitor	45	-20,0%	PASS

DENEY RAPORU / TEST REPORT

4- Button Durability Test

Button Durability Test			
Test method	The unlock button is pressed 10000 times at intervals of 1 to 2 seconds.		
Test scope	10000 on/off cycles		
	Intertek Test Results	Criteria	Verdict
2500 cycles	No deformation observed	No deformation	PASS
5000 cycles	No deformation observed	No deformation	PASS
7500 cycles	No deformation observed	No deformation	PASS
10000 cycles	No deformation observed	No deformation	PASS

DENEY RAPORU / TEST REPORT

5- Acoustic Noise Test

Acoustic Noise Test			
Test method	After logging into Windows, sleep mode is disabled through the Settings menu. The sound level is measured for 1 minute at the specified distances using a dB meter. The test is repeated three times, and the average value is calculated to determine the overall result.		
Test ambient noise level	22,7 dB		
	Intertek Test Results	Casper Test Results (Test ambient: 30-33dB)	Verdict
Distance: 50cm			
Music (Speakers)	75 dB	72 dB	PASS
Distance: 100cm			
Music (Speakers)	69 dB	78 dB	PASS

DENEY RAPORU / TEST REPORT

BÖLÜM 3: TEST SONUÇLARI:

/SECTION 3: TEST RESULTS

Madde /Clause	Tanım /Description	Ortam Şartı /Ambient Condition	Sonuç /Result
1	System Performance and Gaming Benchmark Test	22,8 °C, 49,7 %Rh	P
2	Display Brightness Uniformity Test	23,7 °C, 49,5 %Rh	P
3	Thermal Performance Test	23,4 °C, 50,4 %Rh	P
4	Button Durability Test	23,5 °C, 50,8 %Rh	P
5	Acoustic Noise Test	22,1 °C, 50,2 %Rh	P

Ek Bilgi:

/ Supplementary Information:

P: Uygun / Conformed

F: Uygunsuzluk / Non-Conformity

N/A: Uygulanabilir değil / Not Applicable

Madde /Clause	Değerlendirme / Assessment
1	No results outside the permissible deviations specified by the acceptance criteria were observed.
2	No results outside the permissible deviations specified by the acceptance criteria were observed.
3	No results outside the permissible deviations specified by the acceptance criteria were observed.
4	No results outside the permissible deviations specified by the acceptance criteria were observed.
5	No results outside the permissible deviations specified by the acceptance criteria were observed.

Test Eden: /Tested by	Hasan Erdem ESMER	Onaylayan: /Approved by	Hüseyin YAMAN
Ünvan: /Title	Project Engineer	Ünvan: /Title	Team Leader
İmza: /Signature		İmza: /Signature	
Tarih: /Date	29.09.2026	Tarih: /Date	29.09.2026

DENEY RAPORU / TEST REPORT

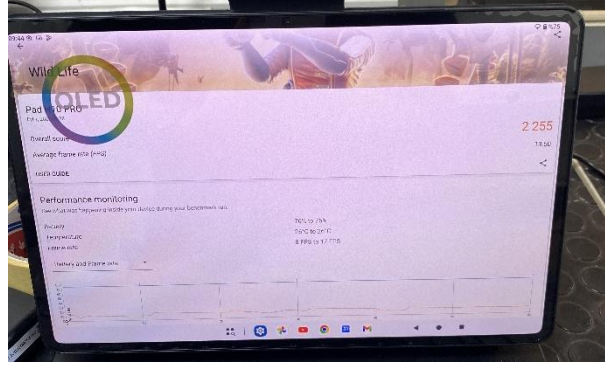
BÖLÜM 4: TEST EKİPMANLARI:

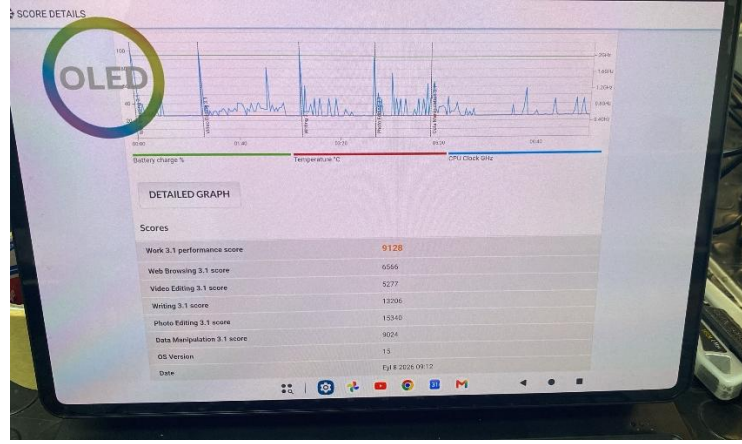
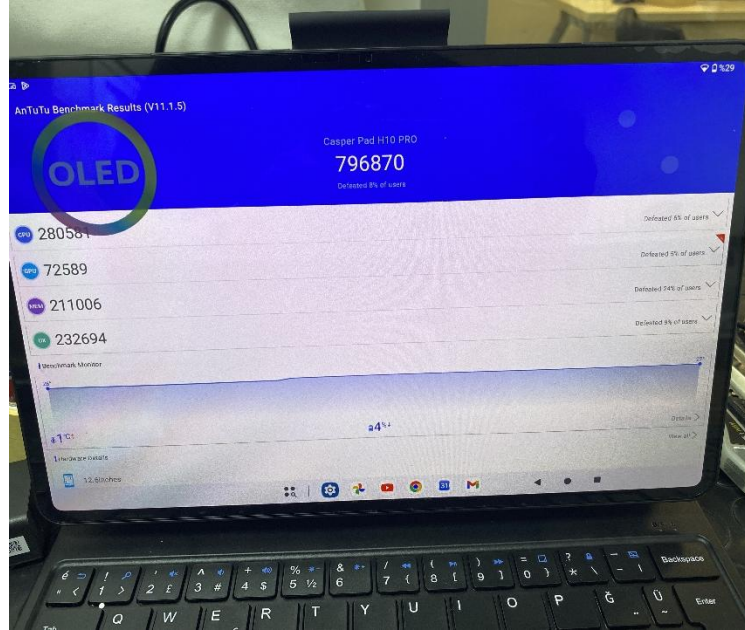
/SECTION 4: TEST EQUIPMENT

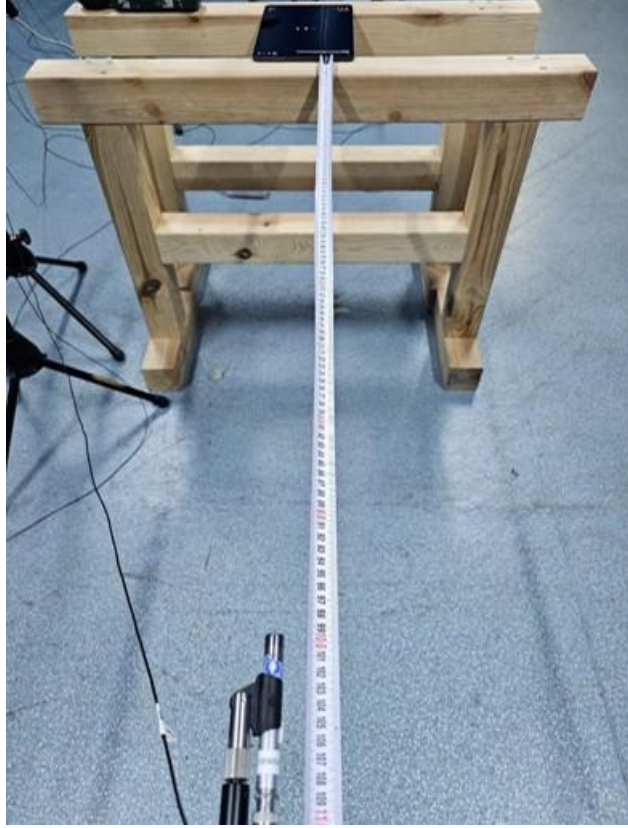
Ekipman Adı /Equipment Name	Üretici /Manufacturer	Ekipman /ID	Kalibrasyon Tarihi /Calibration Date	Sonraki Kal. Tarihi /Next Cal. Date
Infrared - Visual Thermometer	Fluke	EN 9	10.2025	10.2026
Chronometer	Casio HS-80TW	EN 114	02.2026	02.2027
Temperature Recorder	HIOKI	EN 284	06.2026	06.2027
Calliper	INSIZE	EN 288	07.2026	07.2027
Miniature Spectrometer	Ocean Optics	EN 265 B	Initial Calibration	Initial Calibration
Analyser	Brüel & Kjaer	EN 163	08.2026	08.2027
Calibrator	Brüel & Kjaer	EN 164	08.2026	08.2027
Microphone 1	G.R.A.S	EN 165	08.2026	08.2027
Microphone 2	G.R.A.S	EN 166	08.2026	08.2027
Microphone 3	G.R.A.S	EN 167	08.2026	08.2027
Tape	Ceta Form P05-0316	EN 40	11.2025	11.2028
Ambient Meter	Dostmann Electronic	EN 319	01.2026	01.2027



DENEY RAPORU / TEST REPORT**BÖLÜM 5: FOTO DOKÜMANTASYON**
*/SECTION 5: PHOTO DOCUMENTATION***General Photos:****Photo 1.** General view of the Tablet**Photo 2.** General view of the Tablet

DENEY RAPORU / TEST REPORT**Test Photos:****Photo 3. 3DMark test of the Tablet****Photo 4. Thermal performance test of the Tablet**

DENEY RAPORU / TEST REPORT**Photo 5. PCMark test of the Tablet****Photo 6. AnTuTu Benchmark Test of the Tablet**

DENEY RAPORU / TEST REPORT**Photo 7.** Acoustic noise test of the Tablet